


SN65ALS180, SN75ALS180 DIFFERENTIAL DRIVER AND RECEIVER PAIRS

SLLS052F – AUGUST 1987 – REVISED JUNE 2000

- Meet or Exceed the Requirements of TIA/EIA-422-B, TIA/EIA-485-A† and ITU Recommendation V.11
- High-Speed Advanced Low-Power Schottky Circuitry
- Designed for 25-Mbaud Operation in Both Serial and Parallel Applications
- Low Skew Between Devices . . . 6 ns Max
- Low Supply-Current Requirements . . . 30 mA Max
- Individual Driver and Receiver I/O Pins With Dual V_{CC} and Dual GND
- Wide Positive and Negative Input/Output Bus Voltage Ranges
- Driver Output Capacity . . . ± 60 mA
- Thermal Shutdown Protection
- Driver Positive- and Negative-Current Limiting
- Receiver Input Impedance . . . 12 k Ω Min
- Receiver Input Sensitivity . . . ± 200 mV Max
- Receiver Input Hysteresis . . . 60 mV Typ
- Operate From a Single 5-V Supply
- Glitch-Free Power-Up and Power-Down Protection

D OR N PACKAGE
(TOP VIEW)



NC – No internal connection

description

The SN65ALS180 and SN75ALS180 differential driver and receiver pairs are monolithic integrated circuits designed for bidirectional data communication on multipoint bus-transmission lines. They are designed for balanced transmission lines and meet TIA/EIA-422-B, TIA/EIA-485-A, and ITU Recommendation V.11.

The SN65ALS180 and SN75ALS180 combine a 3-state differential line driver and a differential input line receiver, both of which operate from a single 5-V power supply. The driver and receiver have active-high and active-low enables, respectively, that can be connected together externally to function as a direction control. The driver differential outputs and the receiver differential inputs are connected to separate terminals for greater flexibility and are designed to offer minimum loading to the bus when the driver is disabled or $V_{CC} = 0$.

These ports feature wide positive and negative common-mode voltage ranges, making the device suitable for party-line applications.

The SN65ALS180 is characterized for operation from -40°C to 85°C . The SN75ALS180 is characterized for operation from 0°C to 70°C .



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

† These devices meet or exceed the requirements of TIA/EIA-485-A, except for the Generator Contention Test (para. 3.4.2) and the Generator Current Limit (para. 3.4.3). The applied test voltage ranges are -6 V to 8 V for the SN75ALS180 and -4 V to 8 V for the SN65ALS180.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2000, Texas Instruments Incorporated

SN65ALS180, SN75ALS180

DIFFERENTIAL DRIVER AND RECEIVER PAIRS

SLLS052F – AUGUST 1987 – REVISED JUNE 2000

Function Tables

DRIVER


| INPUT D | ENABLE DE | OUTPUTS | |
|------------|--------------|---------|---|
| | | Y | Z |
| H | H | H | L |
| L | H | L | H |
| X | L | Z | Z |

RECEIVER

| DIFFERENTIAL INPUTS A-B | ENABLE RE | OUTPUT R |
|---|--------------|-------------|
| $V_{ID} \geq 0.2\text{ V}$ | L | H |
| $-0.2\text{ V} < V_{ID} < 0.2\text{ V}$ | L | ? |
| $V_{ID} \leq -0.2\text{ V}$ | L | L |
| X | H | Z |
| Open | L | H |


H = high level, L = low level, ? = indeterminate, X = irrelevant, Z = high impedance (off)

logic symbol†

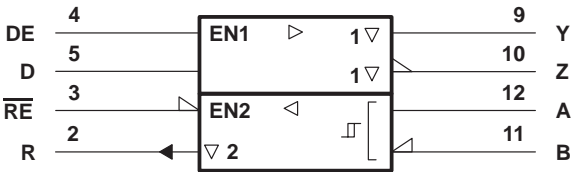

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.



logic diagram (positive logic)

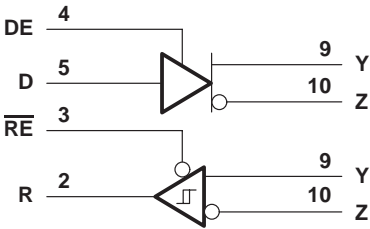

SN65ALS180, SN75ALS180 DIFFERENTIAL DRIVER AND RECEIVER PAIRS

SLLS052F – AUGUST 1987 – REVISED JUNE 2000

schematics of inputs and outputs

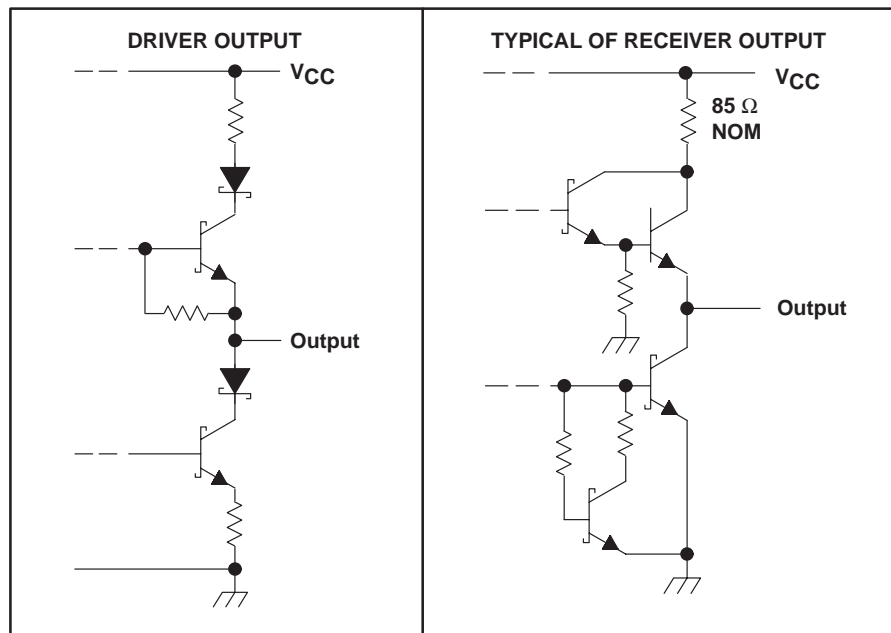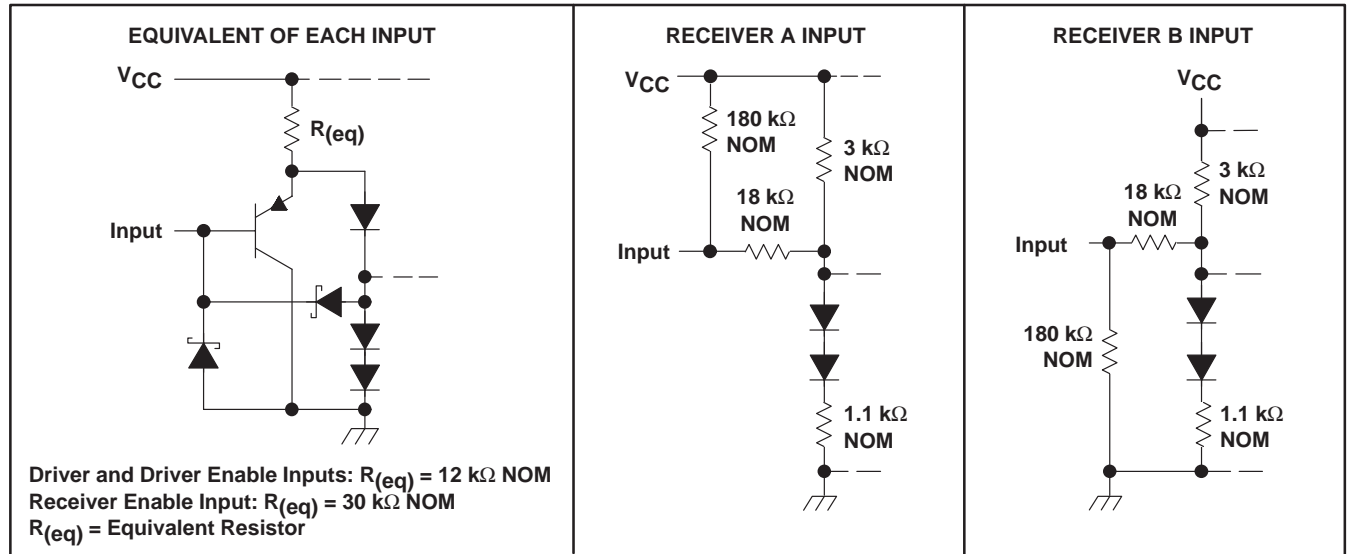

SN65ALS180, SN75ALS180 DIFFERENTIAL DRIVER AND RECEIVER PAIRS

SLLS052F – AUGUST 1987 – REVISED JUNE 2000

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

| | |
|--|----------------|
| Supply voltage, V_{CC} (see Note 1) | 7 V |
| Voltage range at any bus terminal | –10 V to 15 V |
| Enable input voltage, V_I | 5.5 V |
| Package thermal impedance, θ_{JA} (see Note 2): D package | 86°C/W |
| N package | 80°C/W |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C |
| Storage temperature range, T_{st} | –65°C to 150°C |

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential I/O bus voltage, are with respect to network ground terminal.
2. The package thermal impedance is calculated in accordance with JESD 51.

recommended operating conditions

| | | MIN | NOM | MAX | UNIT |
|--|----------------------------|------|-----|------|------|
| Supply voltage, V _{CC} | | 4.75 | 5 | 5.25 | V |
| Voltage at any bus terminal (separately or common mode), V _I or V _{IC} | | 12 | | | V |
| | | −7 | | | |
| High-level input voltage, V _{IH} | D, DE, and \overline{RE} | 2 | | | V |
| Low-level input voltage, V _{IL} | D, DE, and \overline{RE} | 0.8 | | | V |
| Differential input voltage, V _{ID} (see Note 3) | | ±12 | | | V |
| High-level output current, I _{OH} | Driver | −60 | | | mA |
| | Receiver | −400 | | | μA |
| Low-level output current, I _{OL} | Driver | 60 | | | mA |
| | Receiver | 8 | | | |
| Operating free-air temperature, T _A | SN65ALS180 | −40 | | | °C |
| | SN75ALS180 | 0 | | | |

NOTE 3: Differential-input/output bus voltage is measured at the noninverting terminal, A/Y, with respect to the inverting terminal, B/Z.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN65ALS180, SN75ALS180 DIFFERENTIAL DRIVER AND RECEIVER PAIRS

SLLS052F – AUGUST 1987 – REVISED JUNE 2000

DRIVERS

electrical characteristics over recommended ranges of supply voltage and operating free-air temperature range (unless otherwise noted)

| PARAMETER | TEST CONDITION [†] | MIN | TYP [‡] | MAX | UNIT |
|-------------------|---|--|---|---------|------|
| V _{IK} | Input clamp voltage | I _I = -18 mA | | -1.5 | V |
| V _O | Output voltage | I _O = 0 | 0 | 6 | V |
| V _{OD1} | Differential output voltage | I _O = 0 | 1.5 | 6 | V |
| V _{OD2} | Differential output voltage | R _L = 100 Ω, See Figure 1 | 1/2 V _{OD1} or 2 [§] | | V |
| | | R _L = 54 Ω, See Figure 1 | 1.5 | 2.5 | 5 |
| V _{OD3} | Differential output voltage | V _{test} = -7 V to 12 V, See Figure 2 | 1.5 | 5 | V |
| Δ V _{OD} | Change in magnitude of differential output voltage [¶] | R _L = 54 Ω or 100 Ω, See Figure 1 | | ±0.2 | V |
| V _{OC} | Common-mode output voltage | R _L = 54 Ω or 100 Ω, See Figure 1 | | 3 -1 | V |
| Δ V _{OC} | Change in magnitude of common-mode output voltage [¶] | R _L = 54 Ω or 100 Ω, See Figure 1 | | ±0.2 | V |
| I _O | Output current | Output disabled (see Note 4) | V _O = 12 V | 1 | mA |
| | | | V _O = -7 V | -0.8 | |
| I _{IH} | High-level input current | V _I = 2.4 V | | 20 | μA |
| I _{IL} | Low-level input current | V _I = 0.4 V | | -400 | μA |
| I _{OS} | Short-circuit output current [#] | V _O = -6 V | SN75ALS180 | -250 | mA |
| | | V _O = -4 V | SN65ALS180 | -250 | |
| | | V _O = 0 | All | -150 | |
| | | V _O = V _{CC} | All | 250 | |
| | | V _O = 8 V | All | 250 | |
| I _{CC} | Supply current | No load | Driver outputs enabled, Receiver disabled | 25 | mA |
| | | | Outputs disabled | 19 | |

[†] The power-off measurement in TIA/EIA-422-B applies to disabled outputs only and is not applied to combined inputs and outputs.

[‡] All typical values are at V_{CC} = 5 V, T_A = 25°C.

[§] The minimum V_{OD2} with 100-Ω load is either 1/2 V_{OD2} or 2 V, whichever is greater.

[¶] Δ|V_{OD}| and Δ|V_{OC}| are the changes in magnitude of V_{OD} and V_{OC}, respectively, that occur when the input is changed from a high level to a low level.

[#] Duration of the short circuit should not exceed one second for this test.

NOTE 4: This applies for both power on and off; refer to TIA/EIA-485-A for exact conditions. The TIA/EIA-422-B limit does not apply for a combined driver and receiver terminal.

switching characteristics over recommended ranges of supply voltage and operating free-air temperature

| PARAMETER | | TEST CONDITIONS | | | MIN | TYP‡ | MAX | UNIT |
|--------------------|---|-------------------------|-------------------------|--------------|-----|------|-----|------|
| t _{d(OD)} | Differential output delay time | R _L = 54 Ω, | C _L = 50 pF, | See Figure 3 | 3 | 8 | 13 | ns |
| | Pulse skew (t _{d(ODH)} – t _{d(ODL)}) | R _L = 54 Ω, | C _L = 50 pF, | See Figure 3 | | 1 | 6 | ns |
| t _{t(OD)} | Differential output transition time | R _L = 54 Ω, | C _L = 50 pF, | See Figure 3 | 3 | 8 | 13 | ns |
| t _{PZH} | Output enable time to high level | R _L = 110 Ω, | See Figure 4 | | | 23 | 50 | ns |
| t _{PZL} | Output enable time to low level | R _L = 110 Ω, | See Figure 5 | | | 19 | 24 | ns |
| t _{PHZ} | Output disable time from high level | R _L = 110 Ω, | See Figure 4 | | | 8 | 13 | ns |
| t _{PLZ} | Output disable time from low level | R _L = 110 Ω, | See Figure 5 | | | 8 | 13 | ns |

[‡] All typical values are at V_{CC} = 5 V and T_A = 25°C.



SN65ALS180, SN75ALS180 DIFFERENTIAL DRIVER AND RECEIVER PAIRS

SLLS052F – AUGUST 1987 – REVISED JUNE 2000

SYMBOL EQUIVALENTS

| DATA-SHEET PARAMETER | TIA/EIA-422-B | TIA/EIA-485-A |
|-------------------------|---------------------------|---|
| V_O | V_{0a}, V_{0b} | V_{0a}, V_{0b} |
| $ V_{OD1} $ | V_O | V_O |
| $ V_{OD2} $ | $V_t (R_L = 100 \Omega)$ | $V_t (R_L = 54 \Omega)$ |
| $ V_{OD3} $ | | V_t (test termination measurement 2) |
| V_{test} | | V_{tst} |
| $\Delta V_{OD} $ | $ V_t - \bar{V}_t $ | $ V_t - \bar{V}_t $ |
| V_{OC} | $ V_{os} $ | $ V_{os} $ |
| $\Delta V_{OC} $ | $ V_{os} - \bar{V}_{os} $ | $ V_{os} - \bar{V}_{os} $ |
| I_{OS} | $ I_{sa} , I_{sb} $ | |
| I_O | $ I_{xa} , I_{xb} $ | I_{ia}, I_{ib} |

RECEIVERS

electrical characteristics over recommended ranges of common-mode input voltage, supply voltage, and operating free-air temperature (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP† | MAX | UNIT |
|--|--|---|------|----------|---------------|
| V_{IT+} Positive-going input threshold voltage | $V_O = 2.7 \text{ V}$, $I_O = -0.4 \text{ mA}$ | | | 0.2 | V |
| V_{IT-} Negative-going input threshold voltage | $V_O = 0.5 \text{ V}$, $I_O = 8 \text{ mA}$ | -0.2‡ | | | V |
| V_{hys} Hysteresis voltage ($V_{IT+} - V_{IT-}$) | | | 60 | | mV |
| V_{IK} Enable-input clamp voltage | $I_I = -18 \text{ mA}$ | | | -1.5 | V |
| V_{OH} High-level output voltage | $V_{ID} = 200 \text{ mV}$, $I_{OH} = -400 \mu\text{A}$, See Figure 6 | 2.7 | | | V |
| V_{OL} Low-level output voltage | $V_{ID} = -200 \text{ mV}$, $I_{OL} = 8 \text{ mA}$, See Figure 6 | | | 0.45 | V |
| I_{OZ} High-impedance-state output current | $V_O = 0.4 \text{ V to } 2.4 \text{ V}$ | | | ± 20 | μA |
| I_I Line input current | Other input = 0 V (see Note 5) | $V_I = 12 \text{ V}$ | | 1 | mA |
| | | $V_I = -7 \text{ V}$ | | -0.8 | |
| I_{IH} High-level enable-input current | $V_{IH} = 2.7 \text{ V}$ | | | 20 | μA |
| I_{IL} Low-level enable-input current | $V_{IL} = 0.4 \text{ V}$ | | | -100 | μA |
| r_i Input resistance | | 12 | | | k Ω |
| I_{OS} Short-circuit output current | $V_{ID} = 200 \text{ mV}$, $V_O = 0$ | -15 | | -85 | mA |
| I_{CC} Supply current | No load | Receiver outputs enabled, Driver inputs disabled | | 19 | mA |
| | | Outputs disabled | | 19 | |

† All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$.

‡ The algebraic convention, in which the less positive (more negative) limit is designated minimum, is used in this data sheet for common-mode input voltage and threshold voltage levels only.

NOTE 5: This applies for both power on and power off. Refer to TIA/EIA-485-A for exact conditions.



switching characteristics over recommended ranges of supply voltage and operating free-air temperature

| PARAMETER | TEST CONDITIONS | MIN | TYP† | MAX | UNIT |
|---|--|-----|------|-----|------|
| t_{PLH} Propagation delay time, low- to high-level output | $V_{ID} = -1.5 \text{ V to } 1.5 \text{ V}$, See Figure 7 $C_L = 15 \text{ pF}$ | 9 | 14 | 19 | ns |
| t_{PHL} Propagation delay time, high- to low-level output | $V_{ID} = -1.5 \text{ V to } 1.5 \text{ V}$, See Figure 7 $C_L = 15 \text{ pF}$ | 9 | 14 | 19 | ns |
| Skew ($ t_{PHL} - t_{PLH} $) | $V_{ID} = -1.5 \text{ V to } 1.5 \text{ V}$, See Figure 7 $C_L = 15 \text{ pF}$ | | 2 | 6 | ns |
| t_{PZH} Output enable time to high level | $C_L = 15 \text{ pF}$, See Figure 8 | | 7 | 14 | ns |
| t_{PZL} Output enable time to low level | $C_L = 15 \text{ pF}$, See Figure 8 | | 7 | 14 | ns |
| t_{PHZ} Output disable time from high level | $C_L = 15 \text{ pF}$, See Figure 8 | | 20 | 35 | ns |
| t_{PLZ} Output disable time from low level | $C_L = 15 \text{ pF}$, See Figure 8 | | 8 | 17 | ns |

† All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$.

PARAMETER MEASUREMENT INFORMATION

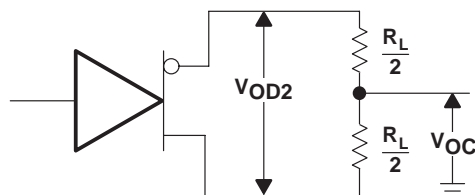


Figure 1. Driver V_{OD} and V_{OC}


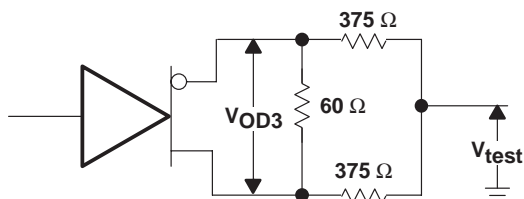


Figure 2. Driver V_{OD3}


SN65ALS180, SN75ALS180 DIFFERENTIAL DRIVER AND RECEIVER PAIRS

SLLS052F – AUGUST 1987 – REVISED JUNE 2000

PARAMETER MEASUREMENT INFORMATION

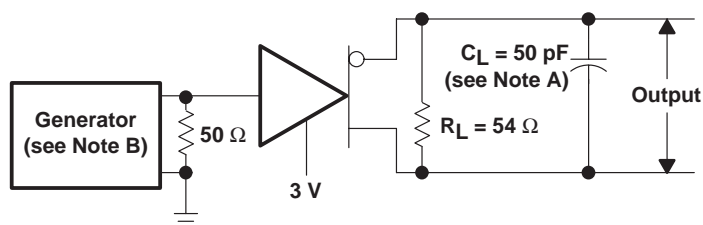

TEST CIRCUIT

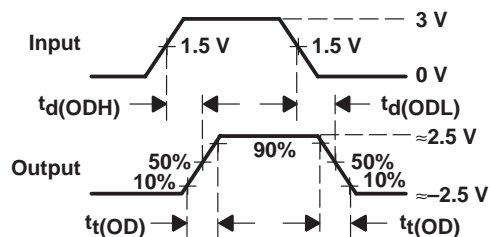


VOLTAGE WAVEFORMS


NOTES: A. C_L includes probe and jig capacitance.

B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1$ MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.

Figure 3. Driver Test Circuit and Voltage Waveforms

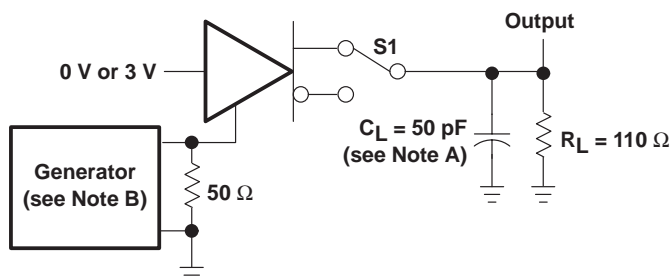

TEST CIRCUIT

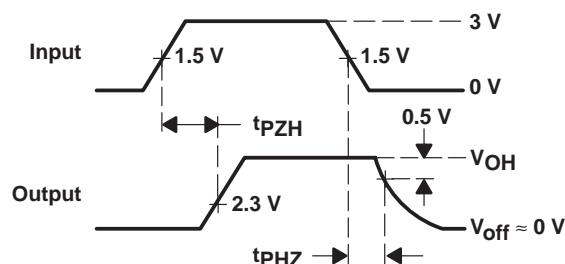


VOLTAGE WAVEFORMS


NOTES: A. C_L includes probe and jig capacitance.

B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1$ MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.

Figure 4. Driver Test Circuit and Voltage Waveforms

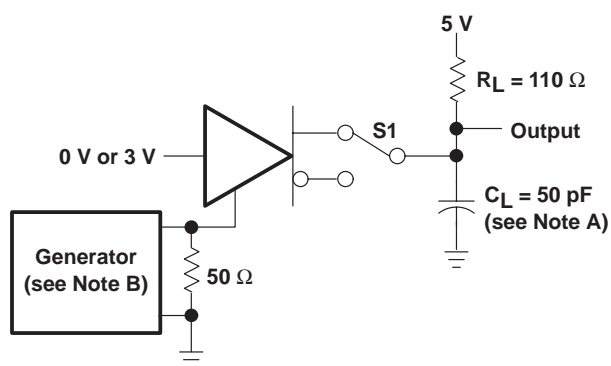

TEST CIRCUIT

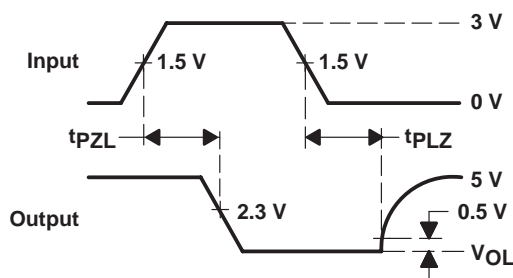

VOLTAGE WAVEFORMS

NOTES: A. C_L includes probe and jig capacitance.

B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1$ MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.

Figure 5. Driver Test Circuit and Voltage Waveforms

PARAMETER MEASUREMENT INFORMATION


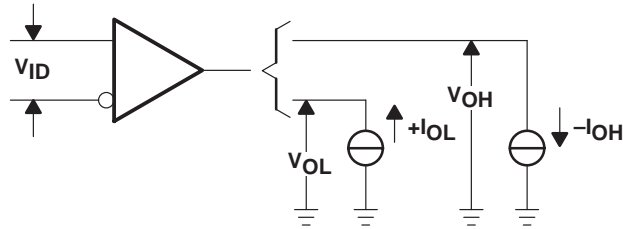


Figure 6. Receiver V_{OH} and V_{OL}

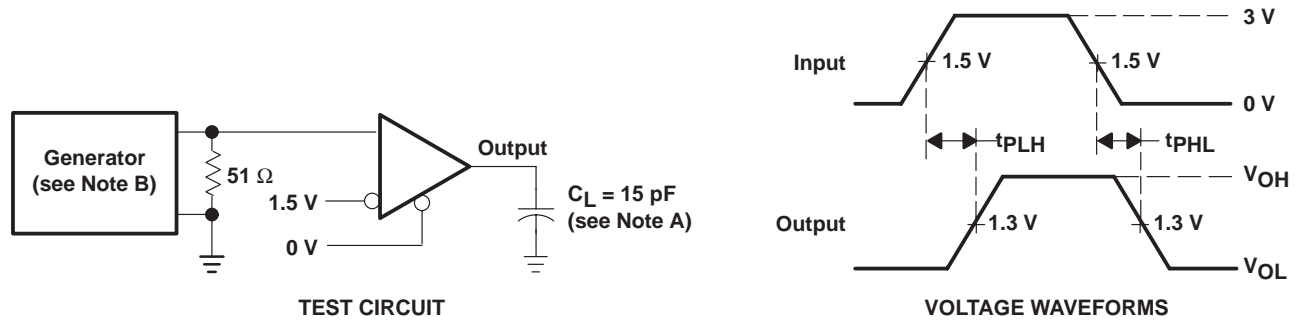


- NOTES: A. C_L includes probe and jig capacitance.
B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1$ MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.

Figure 7. Receiver Test Circuit and Voltage Waveforms

SN65ALS180, SN75ALS180 DIFFERENTIAL DRIVER AND RECEIVER PAIRS

SLLS052F – AUGUST 1987 – REVISED JUNE 2000

PARAMETER MEASUREMENT INFORMATION

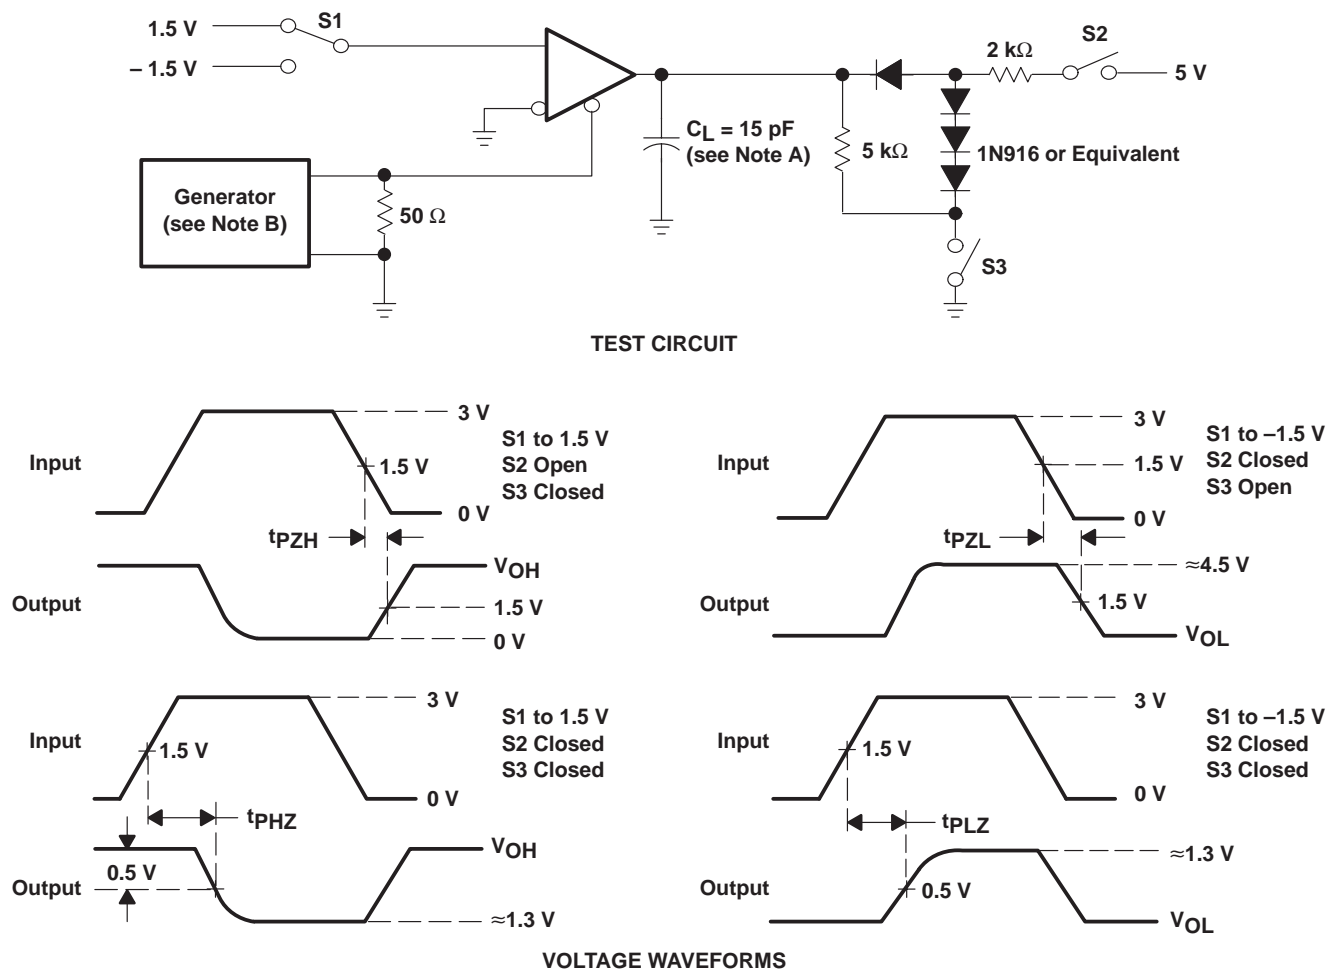

NOTES: A. C_L includes probe and jig capacitance.
B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1$ MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.

Figure 8. Receiver Test Circuit and Voltage Waveforms

TYPICAL CHARACTERISTICS – DRIVERS

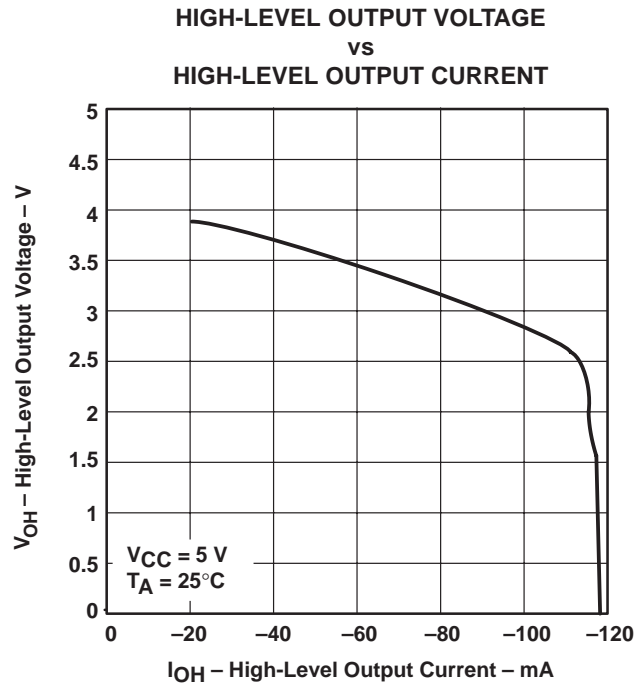


Figure 9

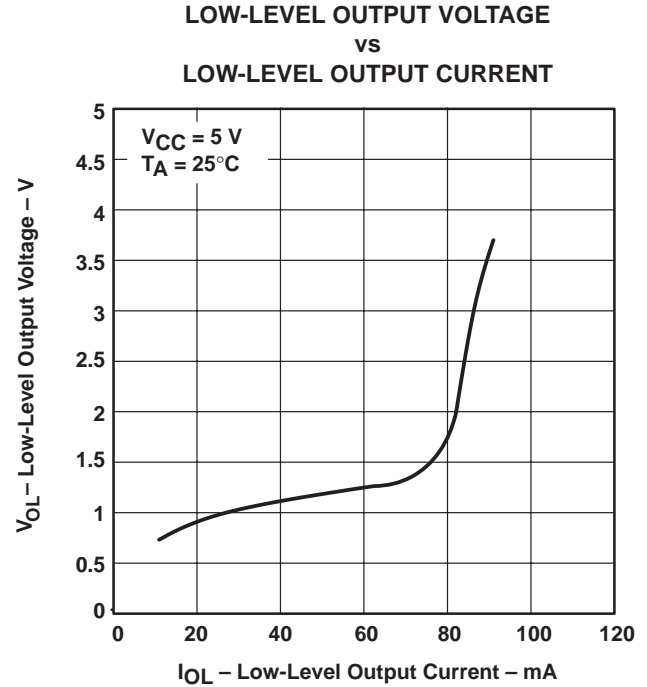


Figure 10

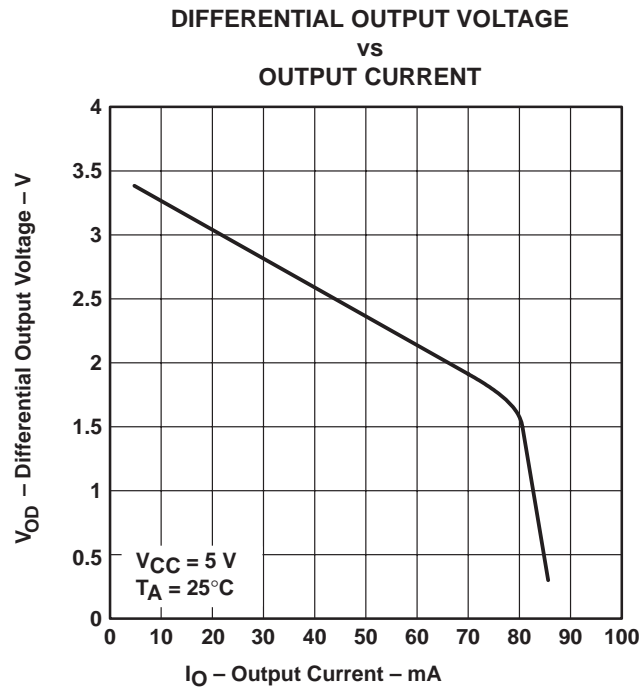


Figure 11

SN65ALS180, SN75ALS180
DIFFERENTIAL DRIVER AND RECEIVER PAIRS

SLLS052F – AUGUST 1987 – REVISED JUNE 2000

TYPICAL CHARACTERISTICS – RECEIVERS

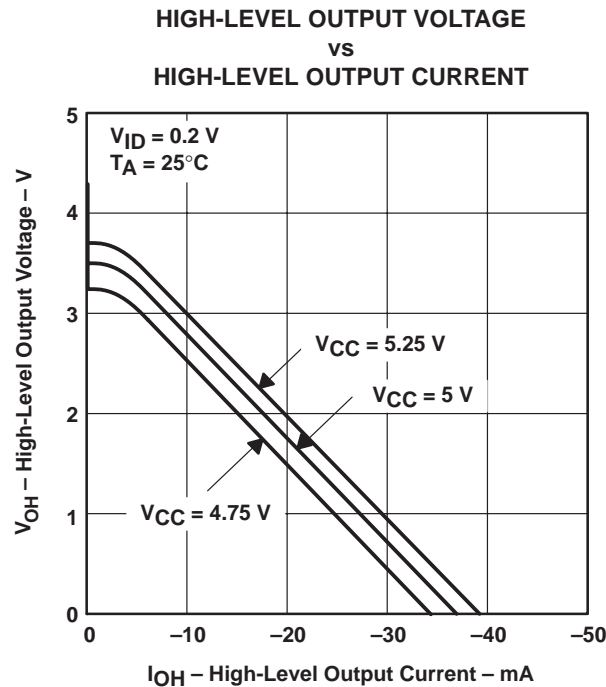


Figure 12

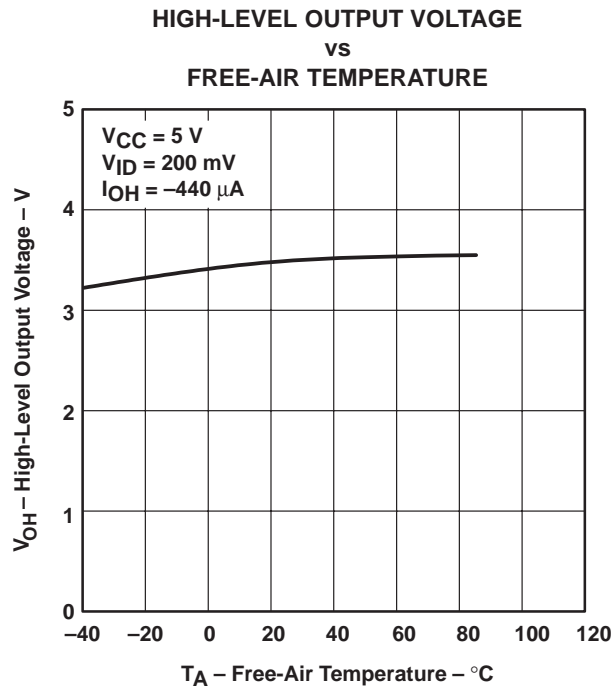


Figure 13

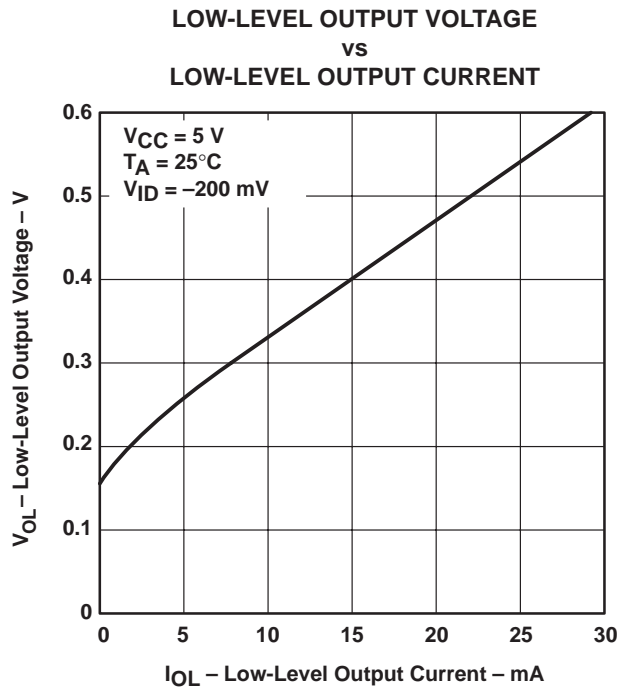


Figure 14

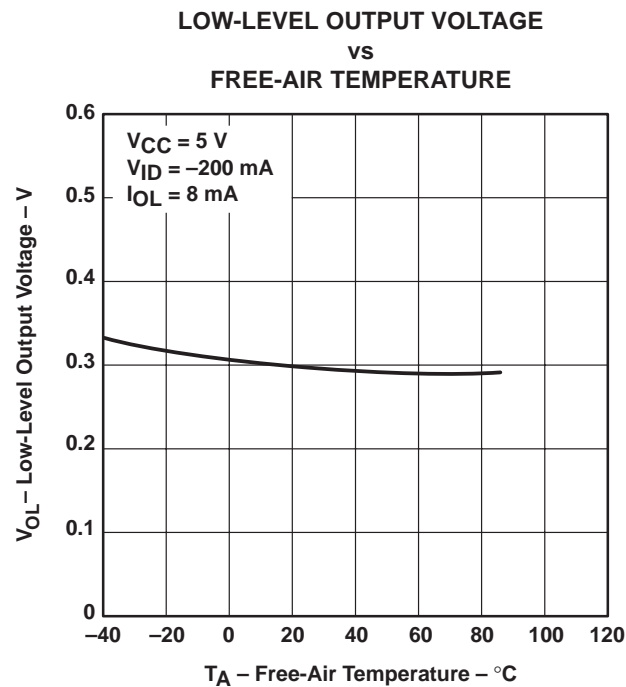


Figure 15

TYPICAL CHARACTERISTICS – RECEIVERS

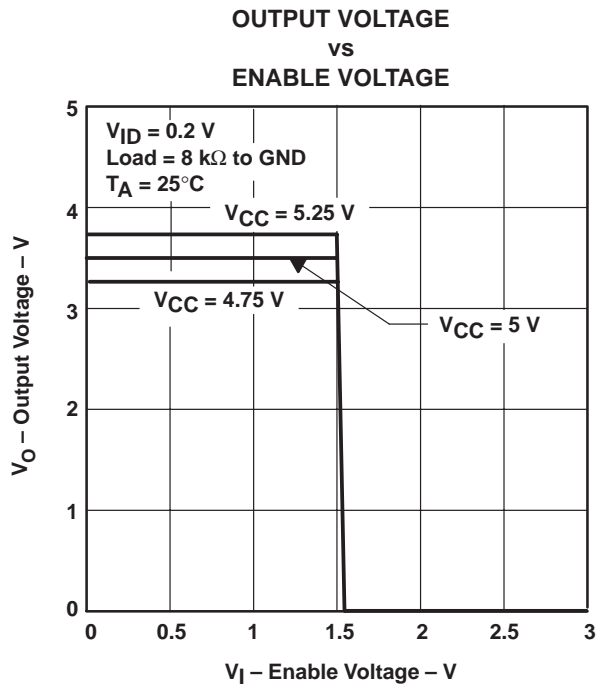


Figure 16


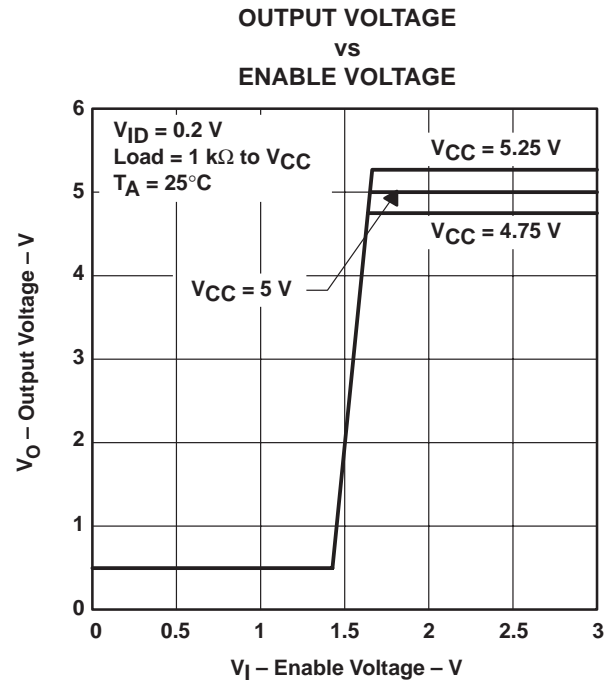


Figure 17

APPLICATION INFORMATION

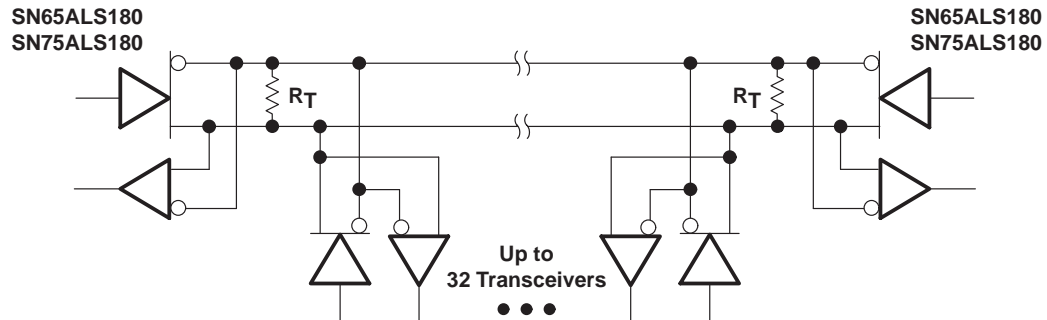

NOTE A: The line should terminate at both ends in its characteristic impedance ($R_T = Z_0$). Stub lengths off the main line should be kept as short as possible.

Figure 18. Typical Application Circuit

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.