


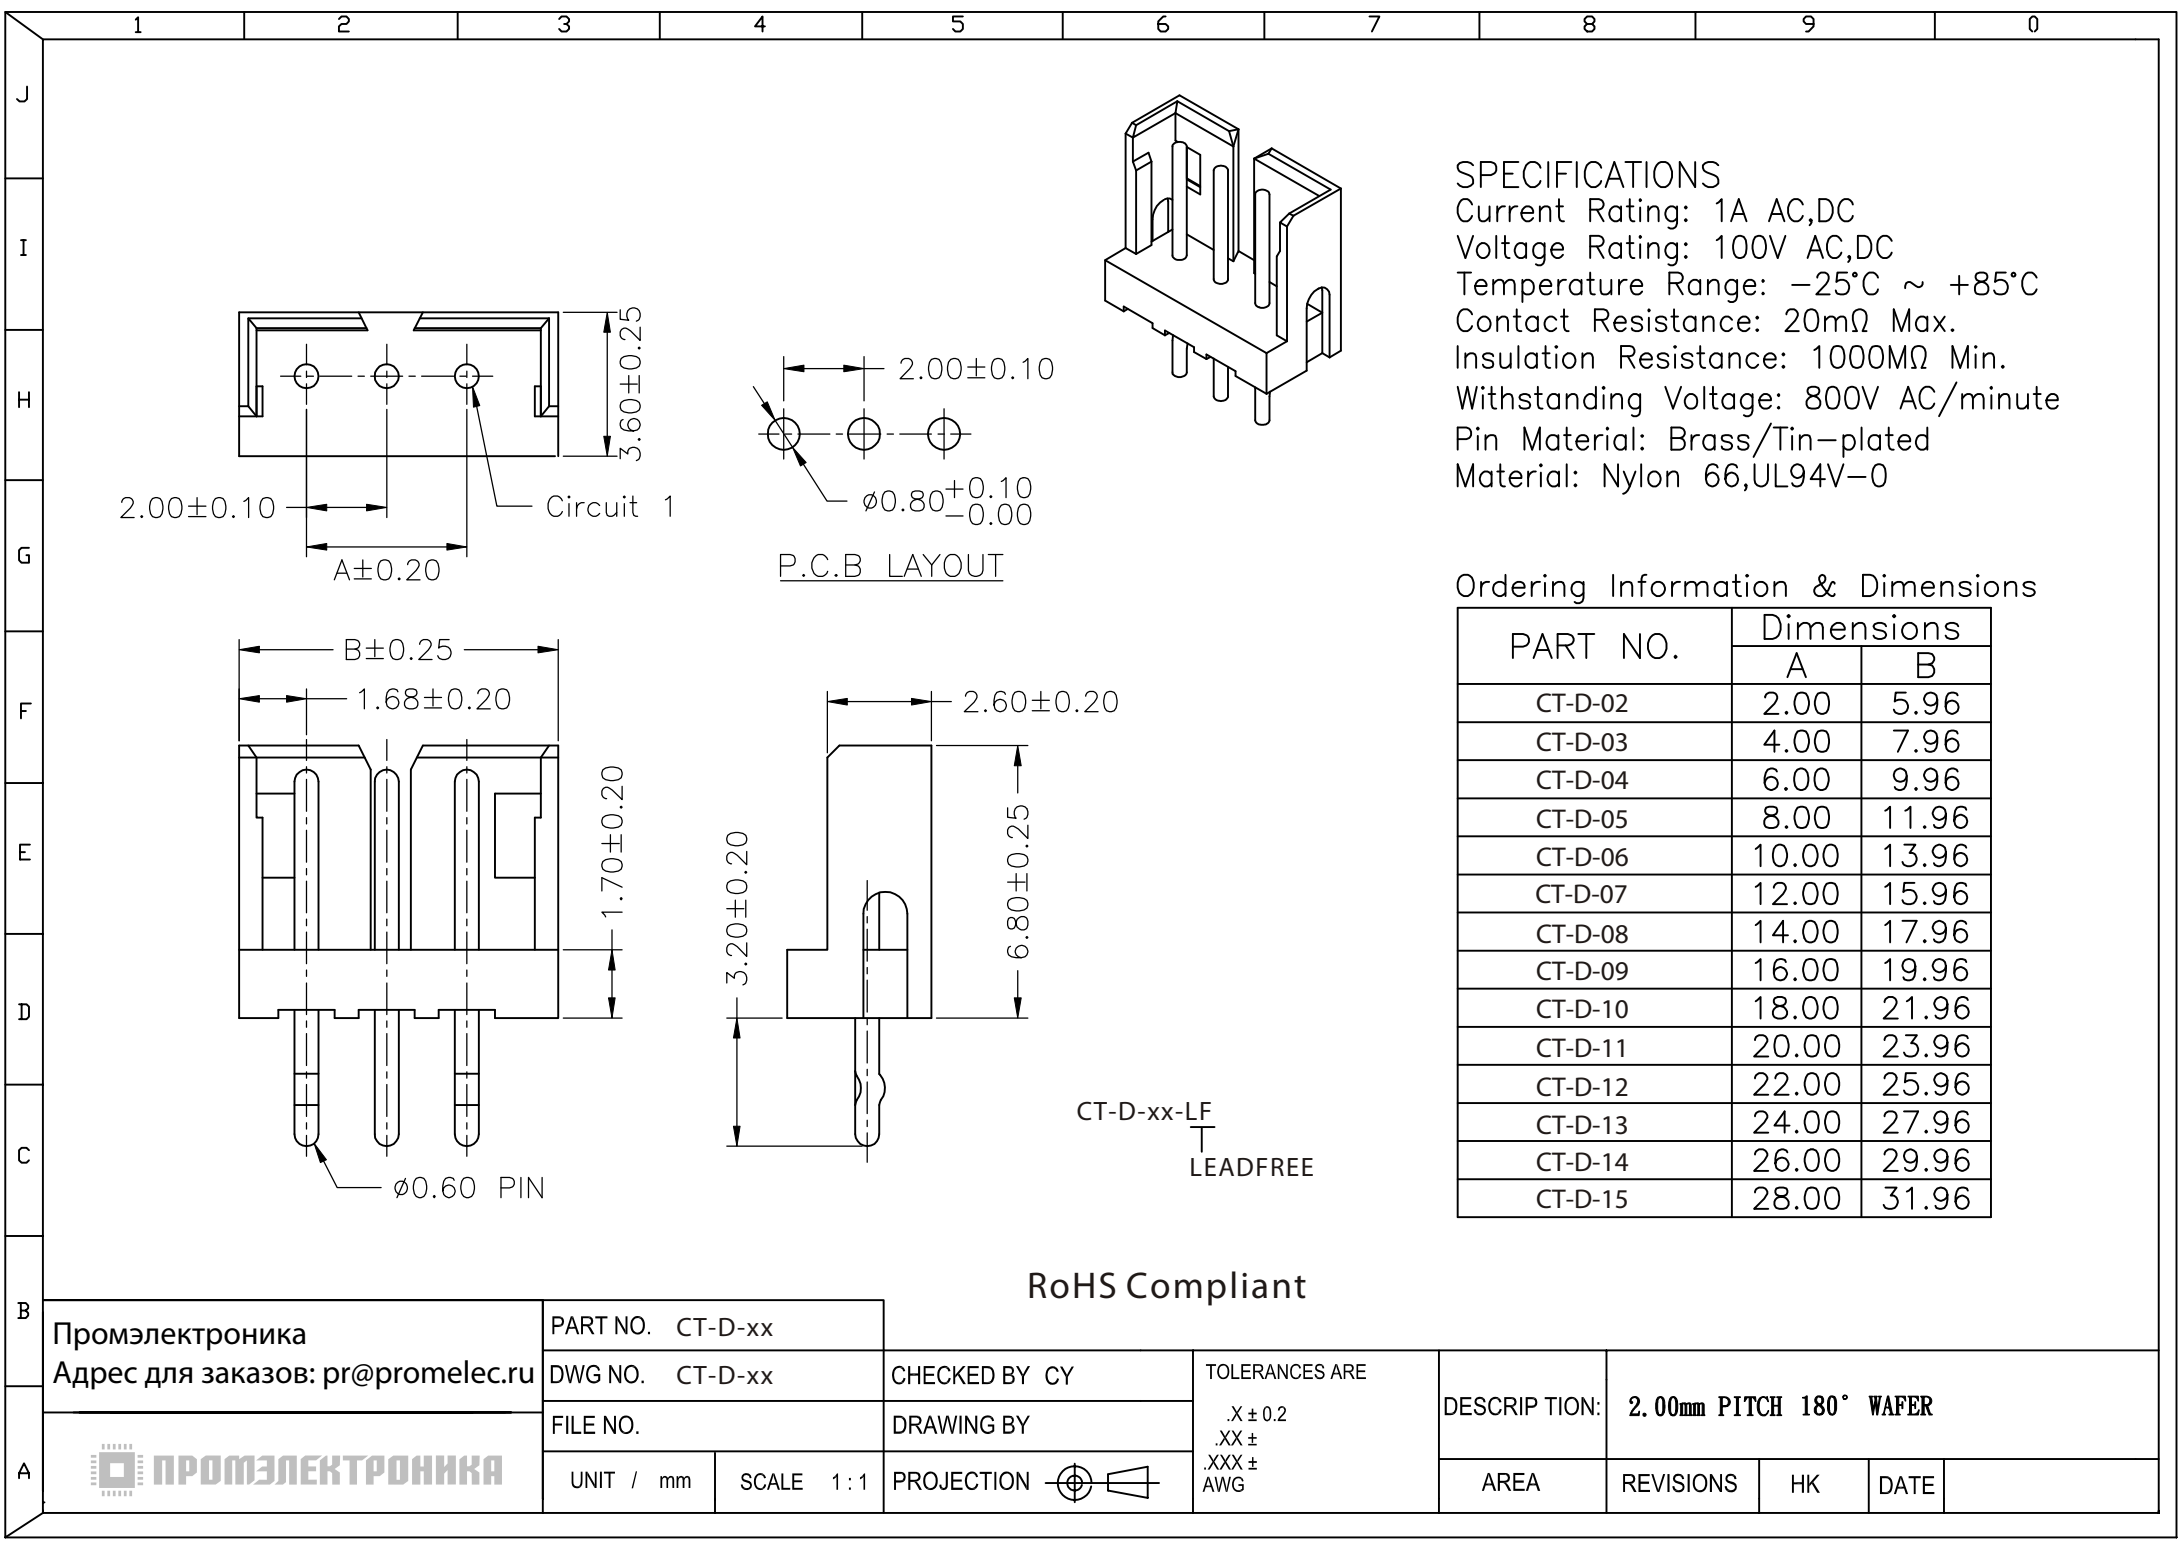

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
CT-D-02	2.00	5.96
CT-D-03	4.00	7.96
CT-D-04	6.00	9.96
CT-D-05	8.00	11.96
CT-D-06	10.00	13.96
CT-D-07	12.00	15.96
CT-D-08	14.00	17.96
CT-D-09	16.00	19.96
CT-D-10	18.00	21.96
CT-D-11	20.00	23.96
CT-D-12	22.00	25.96
CT-D-13	24.00	27.96
CT-D-14	26.00	29.96
CT-D-15	28.00	31.96

RoHS Compliant

Промэлектроника Адрес для заказов: pr@promelec.ru		PART NO. CT-D-xx									
		DWG NO. CT-D-xx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:	2.00mm PITCH 180° WAFER				
		FILE NO.		DRAWING BY							
		UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE		