

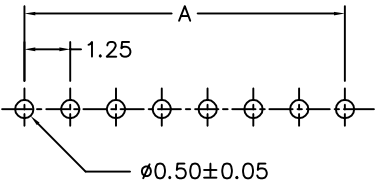
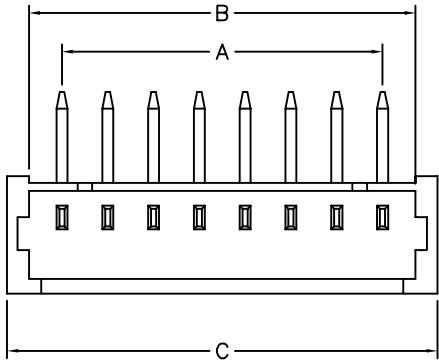
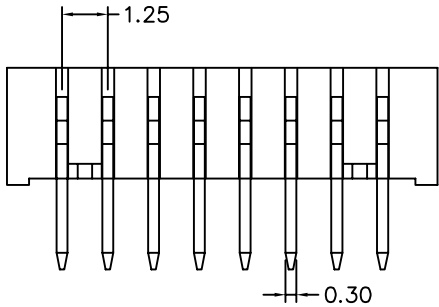


SPECIFICATIONS
Insulator : High Temperature Plastic
Nylon 46, UL94V-0
Contact: High Strength Brass With Tin
Over Nickel Plated



Recommended p.c.board Pattern Dim.

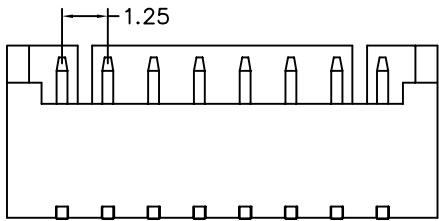

CKT	A	B	C
2	1.25	3.05	4.25
3	2.50	4.30	5.50
4	3.75	5.55	6.75
5	5.00	6.80	8.00
6	6.25	8.05	9.25
7	7.50	9.30	10.50
8	8.75	10.56	11.75
9	10.00	11.80	13.00
10	11.25	13.05	14.25
11	12.50	14.30	15.50
12	13.75	15.55	16.75
13	15.00	16.80	18.00
14	16.25	18.05	19.25
15	17.50	19.30	20.50

DRAWING No.

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF


SCALE

NONE

REV.

A

UNIT
mm



UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG.

AREA

REVISIONS

CHK

DATE