

### KTIR0221DS


#### Features

- High sensing accuracy
- High current transfer ratio
- Both-sides mounting type

#### Applications

- OA equipment, such as floppy disk drives, printers, facsimiles, etc
- VCRs

#### Package Dimensions

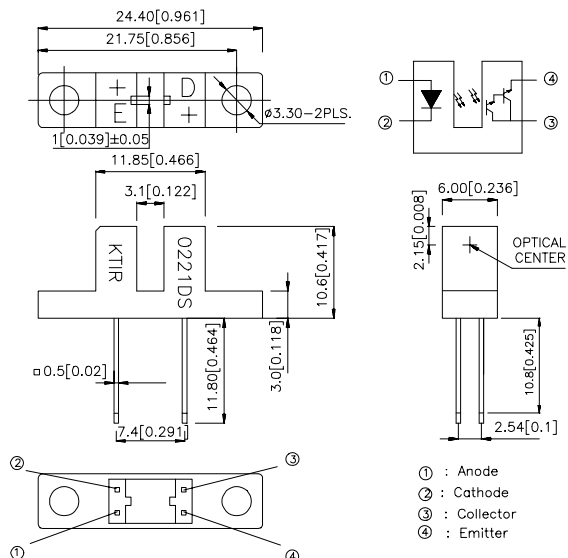

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.15(0.006)$  unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.


#### Absolute Maximum Ratings ( $T_a=25^\circ\text{C}$ )

| Parameter                                                 |                             | Symbol    | Rating   | Unit             |
|-----------------------------------------------------------|-----------------------------|-----------|----------|------------------|
| Input                                                     | Forward current             | $I_F$     | 50       | mA               |
|                                                           | Reverse voltage             | $V_R$     | 5        | V                |
|                                                           | Power dissipation           | P         | 75       | mW               |
| Output                                                    | Collector-emitter voltage   | $V_{CEO}$ | 30       | V                |
|                                                           | Emitter-collector voltage   | $V_{ECO}$ | 5        | V                |
|                                                           | Collector current           | $I_C$     | 40       | mA               |
|                                                           | Collector power dissipation | $P_C$     | 75       | mW               |
| Operating temperature                                     |                             | Topr      | -25~+85  | $^\circ\text{C}$ |
| Storage temperature                                       |                             | Tstg      | -40~+100 | $^\circ\text{C}$ |
| Soldering temperature (1/16 inch from body for 5 seconds) |                             | Tsol      | 260      | $^\circ\text{C}$ |


## Electro-optical Characteristics (Ta=25°C)

| Parameter                        |                                      |           | Symbol               | Conditions                                                        | Min. | Typ. | Max.             | Unit |
|----------------------------------|--------------------------------------|-----------|----------------------|-------------------------------------------------------------------|------|------|------------------|------|
| Input                            | Forward voltage                      |           | V <sub>F</sub>       | I <sub>F</sub> =20mA                                              | —    | 1.2  | 1.5              | V    |
|                                  | Peak forward voltage                 |           | V <sub>FM</sub>      | I <sub>FM</sub> =0.5A                                             | —    | 2    | 4                | V    |
|                                  | Reverse current                      |           | I <sub>R</sub>       | V <sub>R</sub> =5V                                                | —    | —    | 10               | μA   |
| Output                           | Collector dark current               |           | I <sub>CEO</sub>     | V <sub>CE</sub> =10V, I <sub>F</sub> =0mA                         | —    | —    | 10 <sup>-6</sup> | A    |
| Transfer<br>charact-<br>eristics | Current transfer ratio               |           | CTR                  | V <sub>CE</sub> =2V, I <sub>F</sub> =1mA                          | —    | 600  | —                | %    |
|                                  | Collector-emitter saturation voltage |           | V <sub>CE(sat)</sub> | I <sub>F</sub> =2mA, I <sub>C</sub> =1mA                          | —    | —    | 1.0              | V    |
|                                  | Response time                        | Rise time | t <sub>r</sub>       | V <sub>CE</sub> =2V, I <sub>C</sub> =10mA<br>R <sub>L</sub> =100Ω | —    | 90   | 400              | μsec |
|                                  |                                      | Fall time | t <sub>f</sub>       |                                                                   | —    | 80   | 300              | μsec |


**Fig.1 Forward Current vs. Forward Voltage**

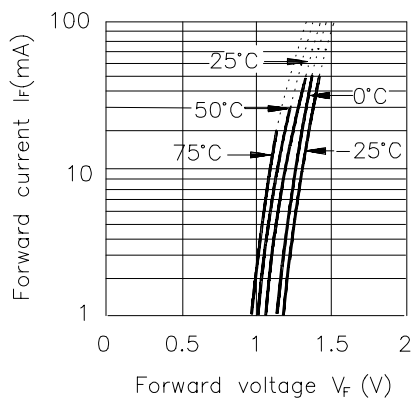


**Fig.2 Collector Current vs. Forward Current**

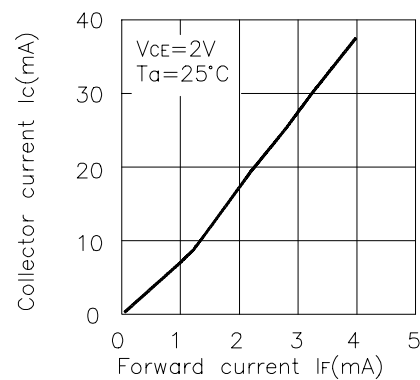


**Fig.3 Collector Current vs. Collector-emitter Voltage**

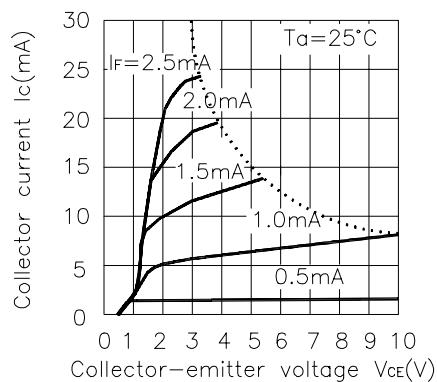


**Fig.4 Collector Current vs. Ambient Temperature**

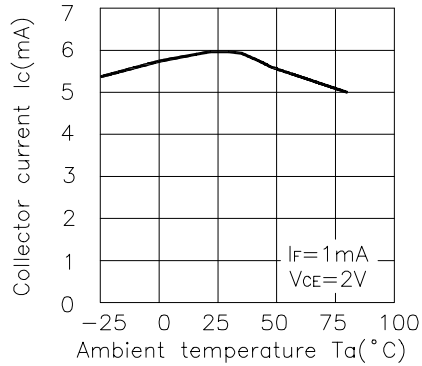


**Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature**

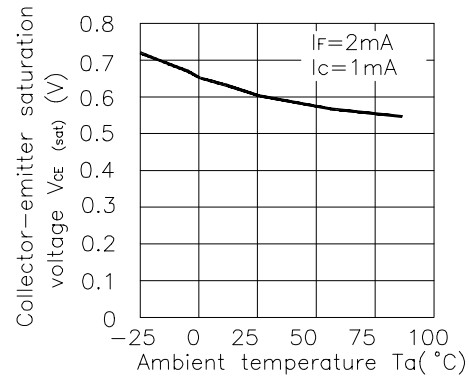


**Fig.6 Relative Collector Current vs. Shield Distance(1)**

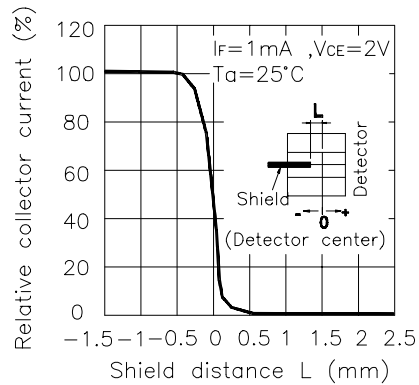

**Fig.7 Relative Collector Current vs. Shield Distance(2)**

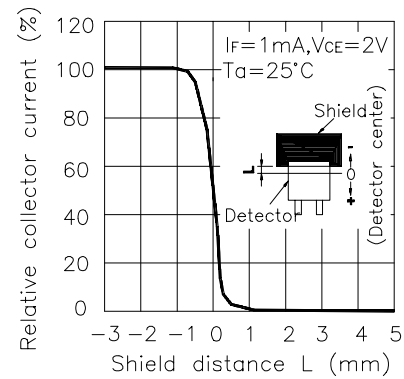

**Fig.8 Response Time vs. Load Resistance**

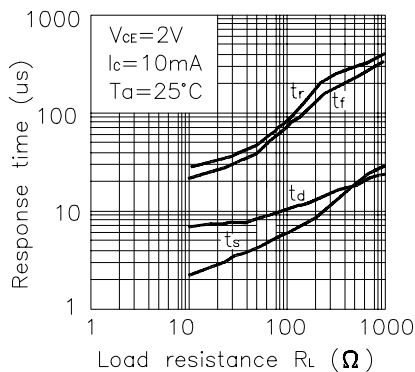

**Test Circuit for Response Time**

