

- Simple structure
- A good ratio of price to quality

9V_{p-p} Square Wave /10cm

Model No.	TFM-47
Min. Sound Pressure Level (dB)	80 /2.5kHz/9V _{P-P} Square Wave /10cm
Max. Consumption (mA)	3 /2.5kHz/9V _{P-P} Square Wave
Resonant Frequency (kHz)	2.5 ± 0.5
Capacitance at 1000Hz (nF)	45 ± 30%
Allowable Input Voltage (V _{P-P})	30
Operating Temperature (°C)	-20 ~ +70
Weight (g)	4.5
Case Material/Colour	ABS/Black
PACKING INFORMATION :	
Packing :	980 pcs per export carton
Carton Size :	47 X 30.5 X 35 cm
G. Weight :	5.7 kgs
N. Weight :	4.2 kgs

TFM-59DA₁(DA₂)



FEATURES:

- Super mini size
- Low current consumption
- High output


TFM59DA-1

d=Ø0.8

TFM-59DA-2



d=Ø0.7

DIMENSIONS: (Unit: mm)

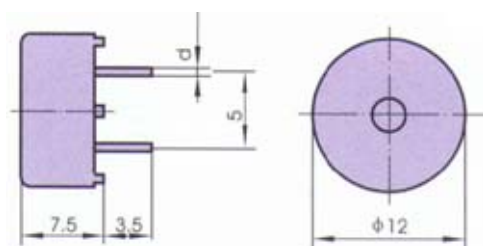

TFM-59D

CHARACTERISTICS:

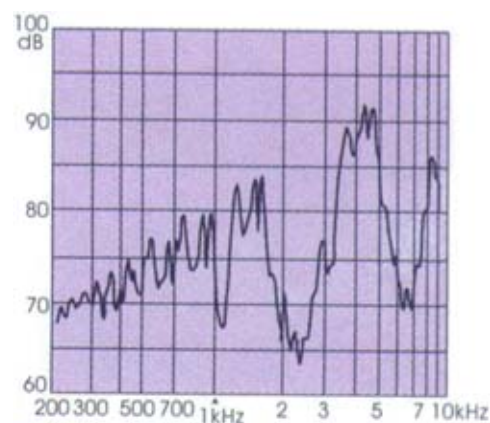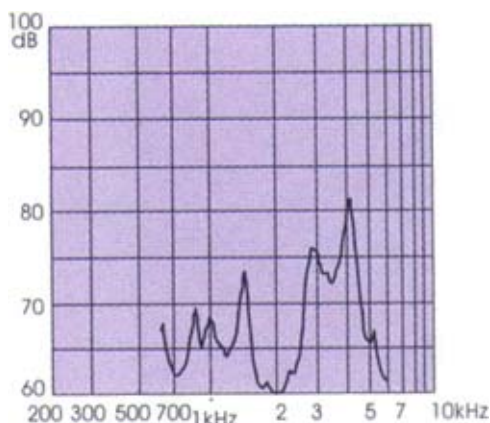

TFM-59DA-1 3V_{P-P} Square Wave /10cm TFM-59DA-2 12V_{P-P} Square Wave /10cm

ELECTRICAL SPECIFICATIONS :

Model No.	TFM-59DA-1	TFM-59DA-2
Min. Sound Pressure Level (dB)	70/4.0kHz/3V _{P-P} Square Wave /10cm	80/4.0kHz/12V _{P-P} Square Wave /10cm
Max. Consumption (mA)	3/4.0kHz/3V _{P-P} Square Wave	6/4.0kHz/12V _{P-P} Square Wave
Resonant Frequency (kHz)	4.0 ± 0.5	
Capacitance at 1000Hz (nF)	11 ± 30%	
Allowable Input Voltage (V _{P-P})	25	
Operating Temperature (°C)	-20 ~ +70	
Weight (g)	1	
Case Material/Colour	PC/Black	

PACKING INFORMATION :

Packing :	5000 pcs per export carton
Carton Size :	47 X 30.5 X 25 cm
G. Weight :	6.5 kgs
N. Weight :	5 kgs