

High-output Speaker




W-01L



W-02L



DIMENSIONS: (Unit: mm)

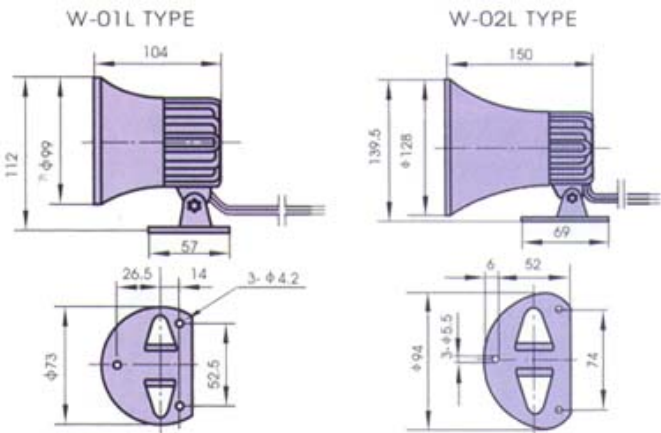

Wire No.	Color
1	Black(W-01(02)) L1 type: white
2	Red
3	Blue(W-01(02)) L2 type: yellow
4	Grey
5	Green

ELECTRICAL SPECIFICATIONS :					
Model No.		W-01(02)L ₁	W-01(02)L ₂	W-01(02)L ₄	W-01(02)L ₆
Min. Sound Pressure Level (dB)		105 /12 V _{DC} /100cm			
Rated Voltage (V _{DC})		12			
Operating Voltage (V _{DC})		6 ~ 15			
Rated Consumption (mA)		400 ~ 1000			
Tones		Single	Dual	Quadruple	Sextuple
Wire Connection	Continuous Cycle	V _{DD} 2 V _{SS} 1		2 1	2 1
	Group Control	V _{DD} 3 2 V _{SS} 1 1		2 1+3 1+3+4 1+3+5 1+3+4+5	ii
Operating Temperature (°C)		-20 ~ +60			
Weight (g)		450			
Note: If the buzzer has a group control, a suffix of "s" is added to the part-number, e.g :W-01L6S.					
PACKING INFORMATION :					
ii		W-01L		W-02L	
Packing:		24 pcs per export carton		12pcs per export carton	
Carton Size:		47 X 30.5 X 35 cm		47 X 30.5 X 35 cm	
G. Weight:		11 kgs		7.4 kgs	
N. Weight:		9.4 kgs		5.4 kgs	