




WG128128B Graphic 128x128 dots

Dimension drawing

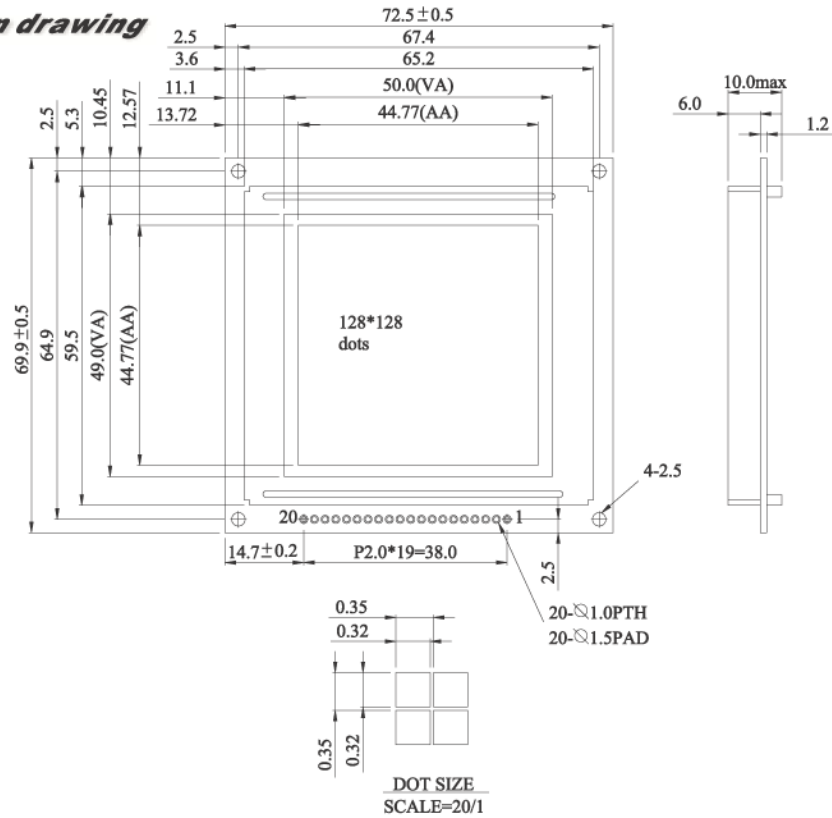

Graphic
type

Feature

1. Built-in controller SANYO(LC7981)
2. 1/128 duty cycle
3. +5V power supply

Mechanical Data

Item	Standard Value	Unit
Module Dimension	72.5x69.9	mm
Viewing Area	50.0x49.0	mm
Dot Size	0.32x0.32	mm
Dot Pitch	0.35x0.35	mm

Pin NO.	Symbol	Function
1	DB0	Data bus line
2	DB1	Data bus line
3	DB2	Data bus line
4	DB3	Data bus line
5	DB4	Data bus line
6	DB5	Data bus line
7	DB6	Data bus line
8	DB7	Data bus line
9	RS	Data /Instruction select
10	R/W	Data read /write
11	E	Enable signal
12	CS	Chip select
13	RES	Reset signal
14	VEE	Negative voltage output
15	VDD	Power supply (+5V)
16	VSS	Power supply (GND)
17	NC	No connection
18	NC	No connection
19	LED(+)	Power supply for LED B/L(+4.2V)
20	LED(-)	Power supply for LED B/L(0V)

Absolute Maximum Rating

Item	Symbol	Standard Value			Unit
		min.	typ.	max.	
Power Supply	VDD-VSS	4.75	5.0	5.25	V
Input Voltage	VI	-0.3	---	VDD	V

Note : VSS=0 Volt, VDD=5.0 Volt.

Electronical Characteristics

Item	Symbol	Condition	Standard Value			Unit
			min.	typ.	max.	
Input Voltage	VDD	L level	0.7V _{DD}	---	V _{DD}	V
	VIO	H level	---	---	0.3V _{DD}	V
Supply Current	IDD	VDD=5V	---	1.5	---	mA
Recommended LC Driving Voltage for Normal Temp. Version module	VDD-V0	-20°C	---	18.0	---	V
		25°C	---	17.0	---	
		60°C	---	16.0	---	
LED Forward Voltage	VF	25°C	---	4.2	4.6	V
LED Forward Current	IF	25°C	---	---	---	mA
EL Power Supply Current	IEL	Vel=110VAC;400Hz	---	---	5.0	mA